

Serie DDTS-40

Tragkraft bis 160 kg/Paar

Überauszug, Querschnitt 48,0 x 40,0 mm


Material

Stahl (C45E+C)
verzinkt
gefräste Laufbahn

DDTS-...


einseitig ausziehbar

DDTS-40

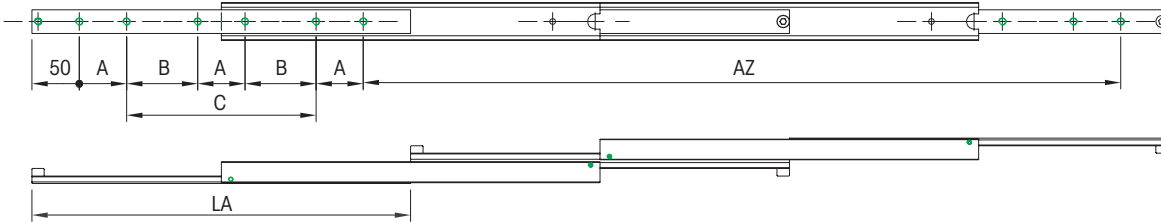

Hinweise:

LA = Länge
AZ = Auszugsweg
TK = Tragkraft bei
10.000 Zyklen
Bohrbild



Artikel-Nr. DDTS-40	TK in kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	Gewicht - kg/St. DDTS-40
07000475001	130	200	400	50	-	-	2,26
07000475002	138	250	500	50	-	50	2,83
07000475003	145	300	600	50	-	100	3,39
07000475004	152	350	700	50	-	150	3,96
07000475005	160	400	800	50	-	200	4,52
07000475006	155	450	900	50	-	250	5,09
07000475007	150	500	1000	50	-	300	5,65
07000475008	145	550	1100	50	150	-	6,22
07000475009	140	600	1200	50	175	-	6,78
07000475010	135	650	1300	50	200	-	7,35
07000475011	130	700	1400	50	225	-	7,91
07000475012	125	750	1500	50	250	-	8,48
07000475013	120	800	1600	50	275	-	9,04
07000475014	115	850	1700	50	300	-	9,61
07000475015	110	900	1800	50	325	-	10,17
07000475016	105	950	1900	50	350	-	10,74
07000475017	100	1000	2000	50	375	-	11,30
07000475018	95	1050	2100	50	400	-	11,87
07000475019	90	1100	2200	50	425	-	12,43
07000475020	85	1150	2300	50	450	-	13,00
07000475021	80	1200	2400	50	475	-	13,56