

Serie OWS-30 | OWST-30

# Load capacity Up to 280 kg/pair

Partial extension

Cross section 11,0 x 30,0 mm

## Material

Steel (C45E+C)  
galvanised  
milled airway


## OWS-...

one-way extension

## OWST-...


two-way extension

### Info:


- L = Length
- TP = Travel path
- LC = Load capacity at 10,000 cycles
-  Drill pattern



## OWS-30

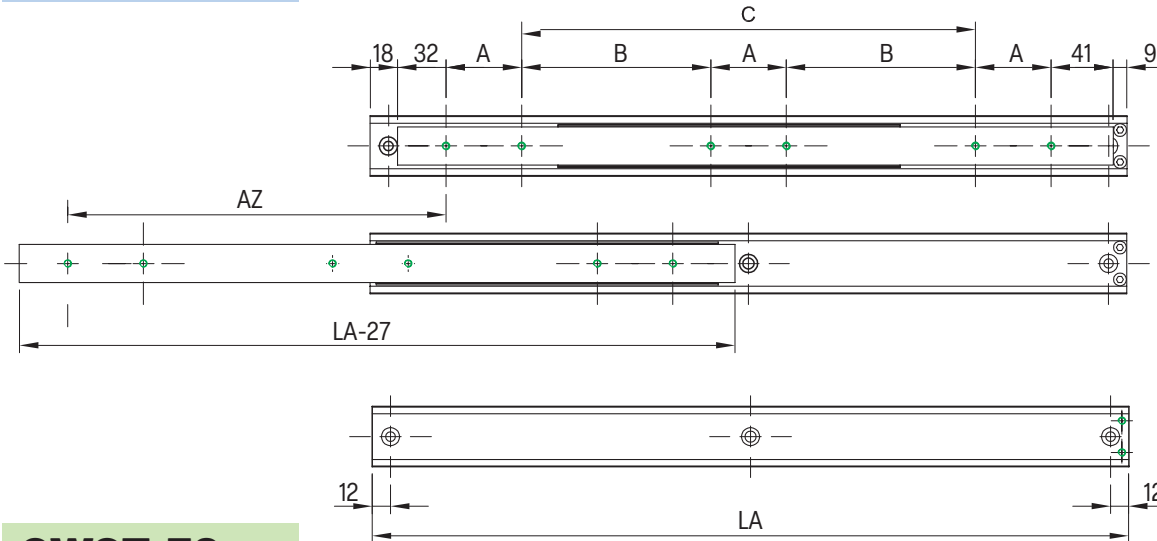

## OWST-30

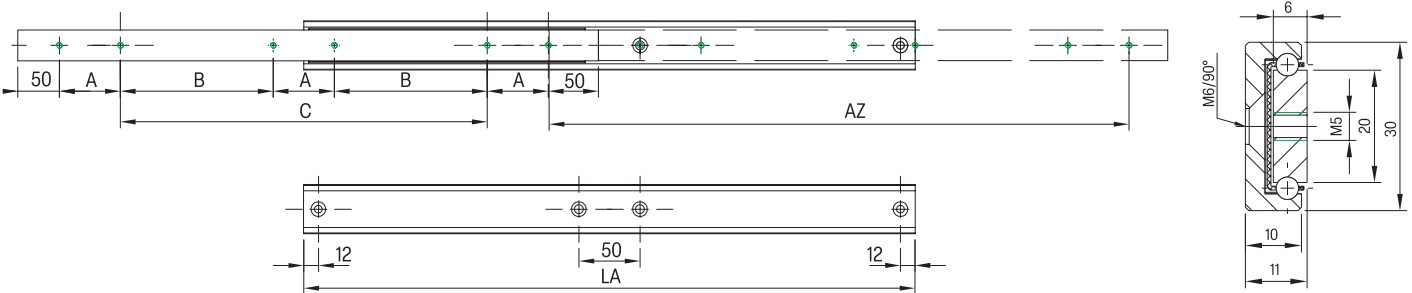

Article-Nr. <b>OWS-30</b>	Article-Nr. <b>OWST-30</b>	LC in kg 10.000	L mm	TP mm	A mm	B mm	C mm	Weight - kg/piece. <b>OWS-30</b>	Weight - kg/piece. <b>OWST-30</b>
07000328001	07000336001	80	150	75	50	-	-	0,32	0,31
07000328002	07000336002	90	200	100	50	-	-	0,43	0,42
07000328003	07000336003	110	250	125	50	-	50	0,53	0,52
07000328004	07000336004	130	300	150	50	-	100	0,64	0,62
07000328005	07000336005	150	350	175	50	-	150	0,75	0,73
07000328006	07000336006	180	400	200	50	-	200	0,85	0,83
07000328007	07000336007	240	450	225	50	-	250	0,96	0,94
07000328008	07000336008	260	500	250	50	-	300	1,06	1,03
07000328009	07000336009	270	550	275	50	150	-	1,17	1,14
07000328010	07000336010	280	600	300	50	175	-	1,28	1,25
07000328011	07000336011	260	650	325	50	200	-	1,38	1,35
07000328012	07000336012	240	700	350	50	225	-	1,49	1,45
07000328013	07000336013	220	750	375	50	250	-	1,60	1,56
07000328014	07000336014	200	800	400	50	275	-	1,70	1,66
07000328015	07000336015	180	850	425	50	300	-	1,81	1,76
07000328016	07000336016	160	900	450	50	325	-	1,92	1,87
07000328017	07000336017	140	950	475	50	350	-	2,02	1,97
07000328018	07000336018	120	1000	500	50	375	-	2,13	2,08