

Serie OWS-70 | OWST-70

Load capacity Up to 1.060 kg/pair

Partial extension

Cross section 21,0 x 70,0 mm

Material

Steel (C45E+C)
galvanised
milled airway


OWS-...

one-way extension

OWST-...


two-way extension

Info:


- L = Length
- TP = Travel path
- LC = Load capacity at 10,000 cycles
-  Drill pattern



OWS-70

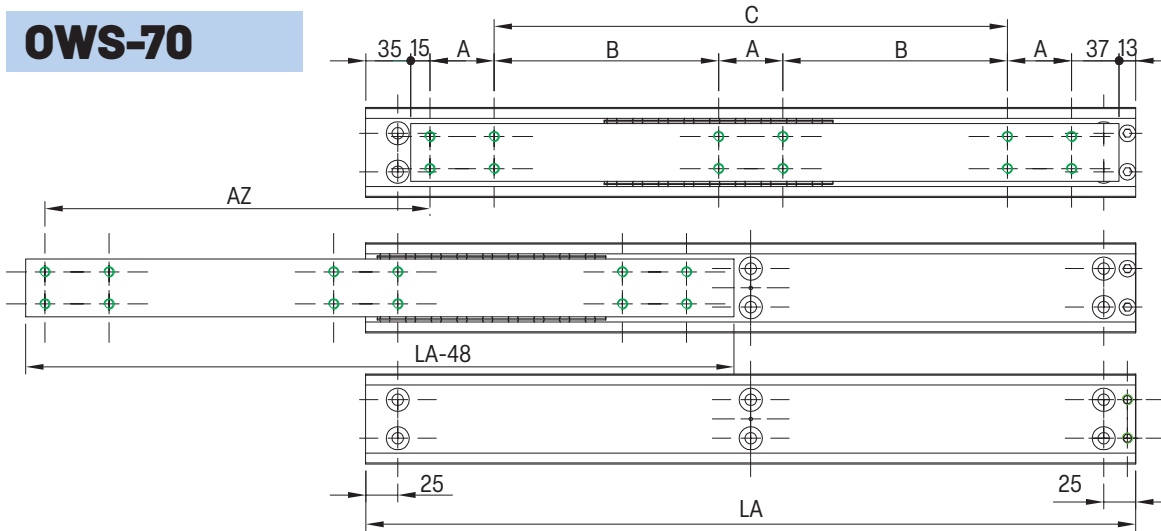

OWST-70

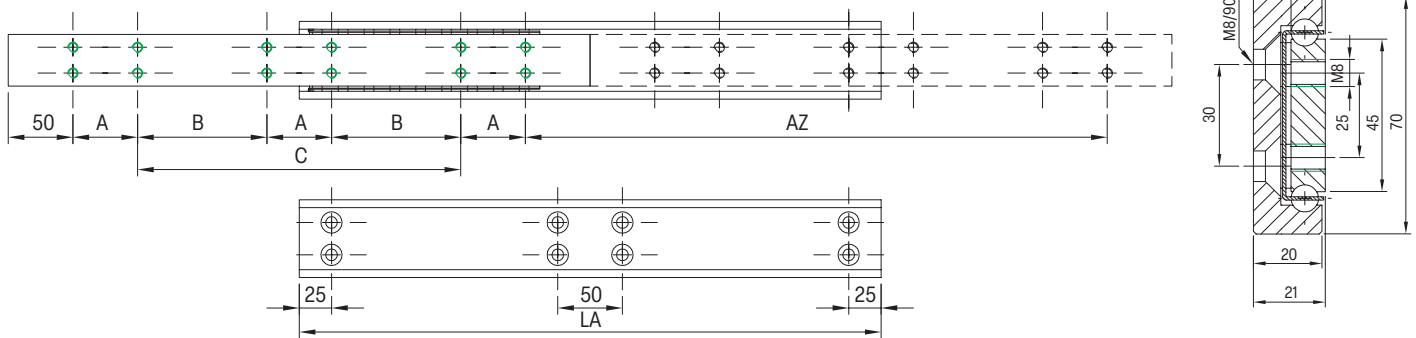

Article-Nr. OWS-70	Article-Nr. OWST-70	LC in kg 10.000	L mm	TP mm	A mm	B mm	C mm	Weight - kg/piece. OWS-70	Weight - kg/piece. OWST-70
07000332001	07000340001	800	300	150	50	-	100	2,76	2,88
07000332002	07000340002	830	350	175	50	-	150	3,22	3,36
07000332003	07000340003	860	400	200	50	-	200	3,68	3,84
07000332004	07000340004	890	450	225	50	-	250	4,14	4,32
07000332005	07000340005	930	500	250	50	-	300	4,60	4,80
07000332006	07000340006	960	550	275	50	-	350	5,06	5,28
07000332007	07000340007	980	600	300	50	-	400	5,52	5,76
07000332008	07000340008	1020	650	325	50	200	-	5,98	6,24
07000332009	07000340009	1060	700	350	50	225	-	6,44	6,72
07000332010	07000340010	1030	750	375	50	250	-	6,90	7,20
07000332011	07000340011	990	800	400	50	275	-	7,36	7,68
07000332012	07000340012	940	850	425	50	300	-	7,82	8,16
07000332013	07000340013	860	900	450	50	325	-	8,28	8,64
07000332014	07000340014	800	950	475	50	350	-	8,74	9,12
07000332015	07000340015	750	1000	500	50	375	-	9,20	9,60
07000332016	07000340016	710	1050	525	50	400	-	9,66	10,08
07000332017	07000340017	670	1100	550	50	425	-	10,12	10,56
07000332018	07000340018	630	1150	575	50	450	-	10,58	11,04
07000332019	07000340019	600	1200	600	50	475	-	11,04	11,52
...
07000332035	07000340035	310	2000	1000	100	800	-	18,4	19,2

Serie OWS-70 | OWST-70

Load capacity Up to 1.060 kg/pair

Partial extension

Cross section 21,0 x 70,0 mm

Article-Nr. OWS-70	Article-Nr. OWST-70	LC in kg 10.000	L mm	TP mm	A mm	B mm	C mm	Weight - kg/piece. OWS-70	Weight - kg/piece. OWST-70
07000332001	07000340001	800	300	150	50	-	100	2,76	2,88
07000332002	07000340002	830	350	175	50	-	150	3,22	3,36
07000332003	07000340003	860	400	200	50	-	200	3,68	3,84
07000332004	07000340004	890	450	225	50	-	250	4,14	4,32
07000332005	07000340005	930	500	250	50	-	300	4,60	4,80
07000332006	07000340006	960	550	275	50	-	350	5,06	5,28
07000332007	07000340007	980	600	300	50	-	400	5,52	5,76
07000332008	07000340008	1020	650	325	50	200	-	5,98	6,24
07000332009	07000340009	1060	700	350	50	225	-	6,44	6,72
07000332010	07000340010	1030	750	375	50	250	-	6,90	7,20
07000332011	07000340011	990	800	400	50	275	-	7,36	7,68
07000332012	07000340012	940	850	425	50	300	-	7,82	8,16
07000332013	07000340013	860	900	450	50	325	-	8,28	8,64
07000332014	07000340014	800	950	475	50	350	-	8,74	9,12
07000332015	07000340015	750	1000	500	50	375	-	9,20	9,60
07000332016	07000340016	710	1050	525	50	400	-	9,66	10,08
07000332017	07000340017	670	1100	550	50	425	-	10,12	10,56
07000332018	07000340018	630	1150	575	50	450	-	10,58	11,04
07000332019	07000340019	600	1200	600	50	475	-	11,04	11,52
07000332020	07000340020	570	1250	625	50	500	-	11,50	12,00
07000332021	07000340021	540	1300	650	50	525	-	11,96	12,48
07000332022	07000340022	510	1350	675	50	550	-	12,42	12,96
07000332023	07000340023	490	1400	700	50	575	-	12,88	13,44
07000332024	07000340024	470	1450	725	50	600	-	13,34	13,92
07000332025	07000340025	450	1500	750	50	625	-	13,80	14,4
07000332026	07000340026	420	1550	775	50	650	-	14,26	14,88
07000332027	07000340027	400	1600	800	50	675	-	14,72	15,36
07000332028	07000340028	390	1650	825	50	700	-	15,18	15,84
07000332029	07000340029	380	1700	850	100	650	-	15,64	16,32
07000332030	07000340030	365	1750	875	100	675	-	16,10	16,80
07000332031	07000340031	350	1800	900	100	700	-	16,56	17,28
07000332032	07000340032	340	1850	925	100	725	-	17,02	17,76
07000332033	07000340033	330	1900	950	100	750	-	17,48	18,24
07000332034	07000340034	320	1950	975	100	775	-	17,94	18,72
07000332035	07000340035	310	2000	1000	100	800	-	18,40	19,20