

Serie QSRT-60

# Tragkraft bis 230 kg/Pair

## Überauszug, Querschnitt 33,0 x 60,0 mm


### Material

Stahl (C45E+C)  
verzinkt  
gefräste Laufbahn

### QSRT-...


einseitig ausziehbar

## QSRT-60

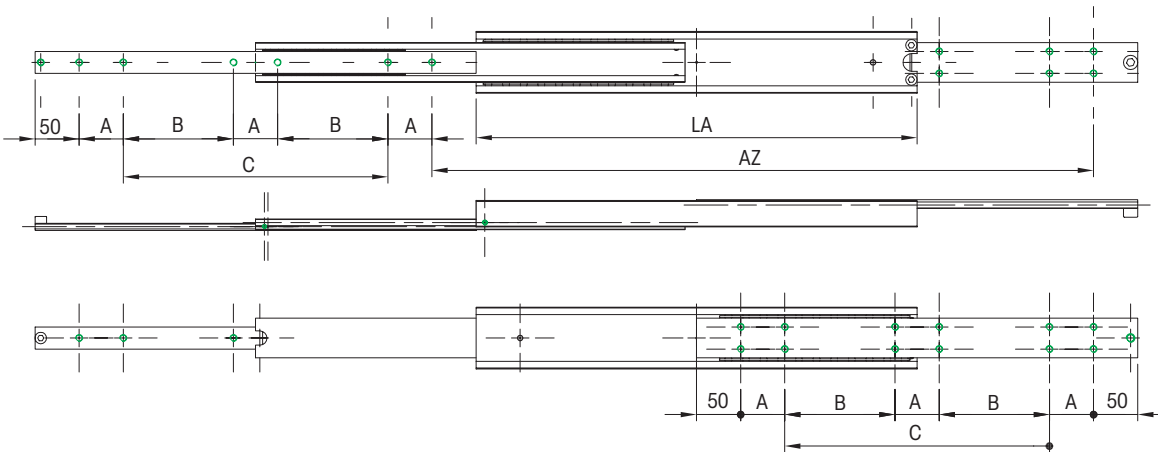

### Hinweise:

LA = Länge  
AZ = Auszugsweg  
TK = Tragkraft bei  
10.000 Zyklen  
Bohrbild



Artikel-Nr. QSRT-60	TK in kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	Gewicht - kg/St. QSRT-60
07000344001	180	300	450	50	-	-	3,67
07000344002	190	350	525	50	-	50	4,29
07000344003	200	400	600	50	-	100	4,90
07000344004	210	450	675	50	-	150	5,51
07000344005	220	500	750	50	-	200	6,12
07000344006	225	550	825	50	-	250	6,74
07000344007	230	600	900	50	-	300	7,35
07000344008	210	650	975	50	150	-	7,96
07000344009	190	700	1050	50	175	-	8,57
07000344010	170	750	1125	50	200	-	9,19
07000344011	160	800	1200	50	225	-	9,80
07000344012	150	850	1275	50	250	-	10,41
07000344013	140	900	1350	50	275	-	11,03
07000344014	135	950	1425	50	300	-	11,64
07000344015	130	1000	1500	50	325	-	12,25
07000344016	125	1050	1575	50	350	-	12,86
07000344017	120	1100	1650	50	375	-	13,48
07000344018	125	1050	1575	50	400	-	12,86
07000344019	120	1100	1650	50	425	-	13,48
...	...	...	...	...	...	...	...
07000344027	70	1600	2400	50	675	-	19,60

Serie QSRT-60

# Tragkraft bis 230 kg/Paar

## Überauszug, Querschnitt 33,0 x 60,0 mm

Artikel-Nr. <b>QSRT-60</b>	TK in kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	Gewicht - kg/St. <b>QSRT-60</b>
07000344001	180	300	450	50	-	-	3,67
07000344002	190	350	525	50	-	50	4,29
07000344003	200	400	600	50	-	100	4,90
07000344004	210	450	675	50	-	150	5,51
07000344005	220	500	750	50	-	200	6,12
07000344006	225	550	825	50	-	250	6,74
07000344007	230	600	900	50	-	300	7,35
07000344008	210	650	975	50	150	-	7,96
07000344009	190	700	1050	50	175	-	8,57
07000344010	170	750	1125	50	200	-	9,19
07000344011	160	800	1200	50	225	-	9,80
07000344012	150	850	1275	50	250	-	10,41
07000344013	140	900	1350	50	275	-	11,03
07000344014	135	950	1425	50	300	-	11,64
07000344015	130	1000	1500	50	325	-	12,25
07000344016	125	1050	1575	50	350	-	12,86
07000344017	120	1100	1650	50	375	-	13,48
07000344018	115	1150	1725	50	400	-	14,09
07000344019	110	1200	1800	50	425	-	14,70
07000344020	105	1250	1875	50	450	-	15,31
07000344021	100	1300	1950	50	475	-	15,93
07000344022	95	1350	2025	50	500	-	16,54
07000344023	90	1400	2100	50	525	-	17,15
07000344024	85	1450	2175	50	550	-	17,76
07000344025	80	1500	2250	50	575	-	18,38
07000344026	75	1550	2325	50	600	-	18,99
07000344027	70	1600	2400	50	625	-	19,60