

Serie TSR-80 | TSRT-80

Load capacity Up to 435 kg/pair

Full extension

Cross section 25,0 x 80,0 mm

Material

Steel (C45E+C)
galvanised
milled airway

TSR-...

one-way extension

TSRT-...

two-way extension

Info:

L = Length


TP = Travel path

LC = Load capacity at
10,000 cycles


 Drill pattern



TSR-80

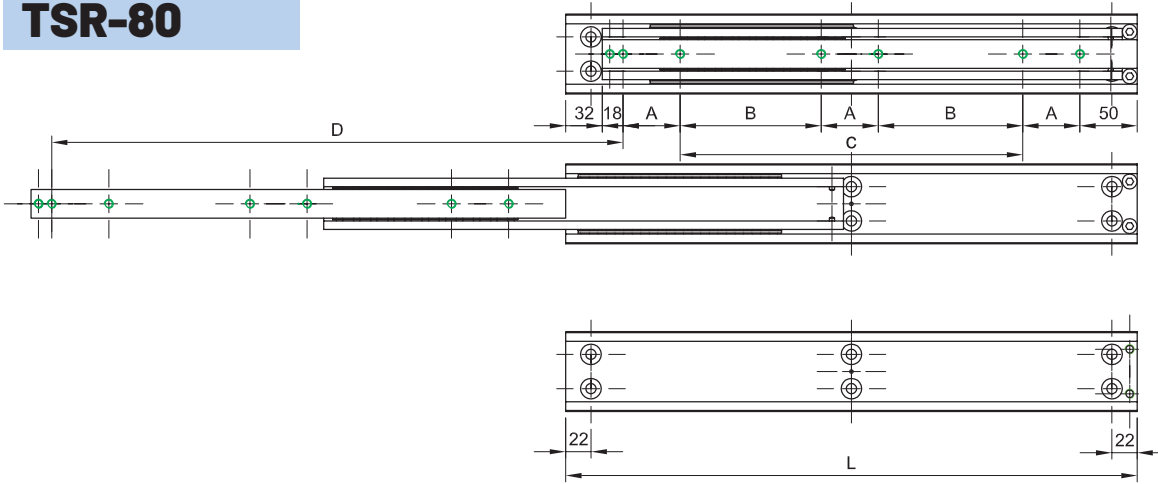

TSRT-80

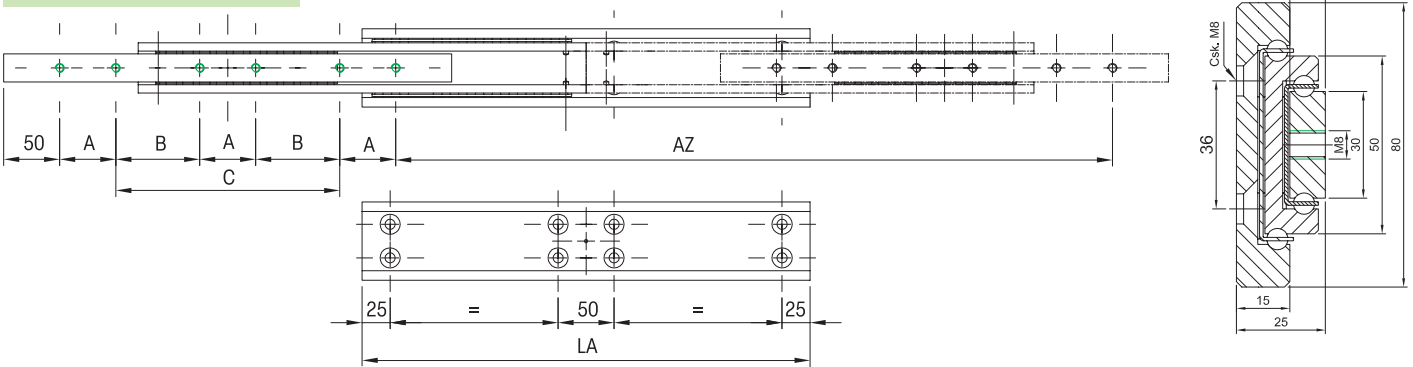

Article-Nr. TSR-80	Article-Nr. TSRT-80	LC in kg 10.000	L mm	TP mm	A mm	B mm	C mm	Weight - kg/piece. TSR-80	Weight - kg/piece. TSRT-80
07000350001	07000945001	390	300	300	50	-	100	3,12	3,12
07000350002	07000945002	400	350	350	50	-	150	3,64	3,64
07000350003	07000945003	405	400	400	50	-	200	4,16	4,16
07000350004	07000945004	410	450	450	50	-	250	4,68	4,68
07000350005	07000945005	415	500	500	50	-	300	5,20	5,20
07000350006	07000945006	420	550	550	50	-	350	5,72	5,72
07000350007	07000945007	425	600	600	50	-	400	6,24	6,24
07000350008	07000945008	435	650	650	50	200	-	6,76	6,76
07000350009	07000945009	430	700	700	50	225	-	7,28	7,28
07000350010	07000945010	425	750	750	50	250	-	7,80	7,80
07000350011	07000945011	420	800	800	50	275	-	8,32	8,32
07000350012	07000945012	410	850	850	50	300	-	8,84	8,84
07000350013	07000945013	400	900	900	50	325	-	9,36	9,36
07000350014	07000945014	390	950	950	50	350	-	9,88	9,88
07000350015	07000945015	380	1000	1000	50	375	-	10,40	10,40
07000350016	07000945016	370	1050	1050	50	400	-	10,92	10,92
07000350017	07000945017	360	1100	1100	50	425	-	11,44	11,44
07000350018	07000945018	345	1150	1150	50	450	-	11,96	11,96
07000350019	07000945019	330	1200	1200	50	475	-	12,48	12,48
...
07000350035	07000945035	140	2000	2000	50	800	-	20,80	20,80

Serie TSR-80 | TSRT-80

Load capacity Up to 435 kg/pair

Full extension

Cross section 25,0 x 80,0 mm

Article-Nr. TSR-80	Article-Nr. TSRT-80	LC in kg 10.000	L mm	TP mm	A mm	B mm	C mm	Weight - kg/piece. TSR-80	Weight - kg/piece. TSRT-80
07000350001	07000945001	390	300	300	50	-	100	3,12	3,12
07000350002	07000945002	400	350	350	50	-	150	3,64	3,64
07000350003	07000945003	405	400	400	50	-	200	4,16	4,16
07000350004	07000945004	410	450	450	50	-	250	4,68	4,68
07000350005	07000945005	415	500	500	50	-	300	5,20	5,20
07000350006	07000945006	420	550	550	50	-	350	5,72	5,72
07000350007	07000945007	425	600	600	50	-	400	6,24	6,24
07000350008	07000945008	435	650	650	50	200	-	6,76	6,76
07000350009	07000945009	430	700	700	50	225	-	7,28	7,28
07000350010	07000945010	425	750	750	50	250	-	7,80	7,80
07000350011	07000945011	420	800	800	50	275	-	8,32	8,32
07000350012	07000945012	410	850	850	50	300	-	8,84	8,84
07000350013	07000945013	400	900	900	50	325	-	9,36	9,36
07000350014	07000945014	390	950	950	50	350	-	9,88	9,88
07000350015	07000945015	390	1000	1000	50	375	-	10,40	10,40
07000350015	07000945016	370	1050	1050	50	400	-	10,92	10,92
07000350017	07000945017	360	1100	1100	50	425	-	11,44	11,44
07000350018	07000945018	345	1150	1150	50	450	-	11,96	11,96
07000350019	07000945019	330	1200	1200	50	475	-	12,48	12,48
07000350020	07000945020	315	1250	1250	50	500	-	13,0	13,00
07000350021	07000945021	300	1300	1300	50	525	-	13,52	13,52
07000350022	07000945022	280	1350	1350	50	550	-	14,04	14,04
07000350023	07000945023	260	1400	1400	50	575	-	14,56	14,56
07000350024	07000945024	250	1450	1450	50	600	-	15,08	15,08
07000350025	07000945025	240	1500	1500	50	625	-	15,60	15,60
07000350026	07000945026	230	1550	1550	50	650	-	16,12	16,12
07000350027	07000945027	220	1600	1600	50	675	-	16,64	16,64
07000350028	07000945028	210	1650	1650	50	700	-	17,16	17,16
07000350029	07000945029	200	1700	1700	100	650	-	17,68	17,68
07000350030	07000945030	190	1750	1750	100	675	-	18,20	18,20
07000350031	07000945031	180	1800	1800	100	700	-	18,72	18,72
07000350032	07000945032	170	1850	1850	100	725	-	19,24	19,24
07000350033	07000945033	160	1900	1900	100	750	-	19,76	19,76
07000350034	07000945034	150	1950	1950	100	775	-	20,28	20,28
07000350035	07000945035	140	2000	2000	100	800	-	20,80	20,80